


# Christmas Arch Assembly and Installation Instructions

1. Assemble arch on the lawn. Match colored tape ends. Insert  $\frac{1}{4}$ " screws through holes and tighten hex nut. Screw vertical legs into the threaded couplings.

2. Attach lights and garland to the arch with tape or twist ties. Be sure to position the plug on the side with the extension cord.

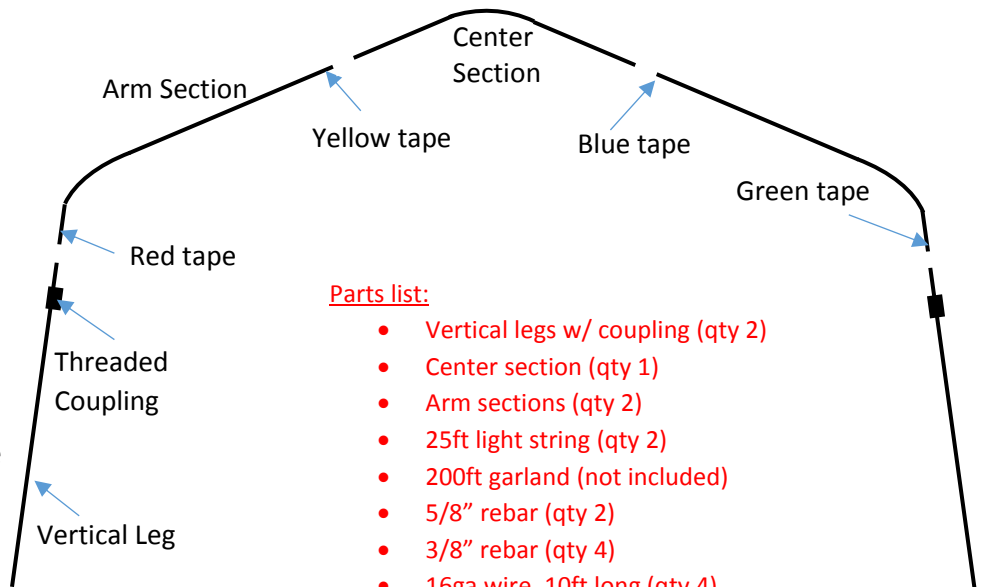


## Parts list:

- Vertical legs w/ coupling (qty 2)
- Center section (qty 1)
- Arm sections (qty 2)
- 25ft light string (qty 2)
- 200ft garland (not included)
- $\frac{5}{8}$ " rebar (qty 2)
- $\frac{3}{8}$ " rebar (qty 4)
- 16ga wire, 10ft long (qty 4)
- Tennis balls (qty 4)
- Fasteners (qty 12)

3. Drive the two large ( $\frac{5}{8}$ " ) rebar stakes half way into the ground, on either side of the street where the arch will be placed.

4. Drive the four smaller ( $\frac{3}{8}$ " ) rebar stakes 5ft from the larger stakes

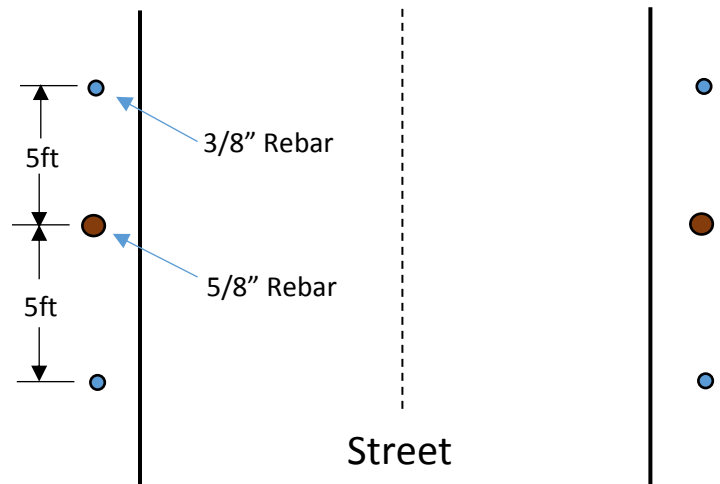

5. Slide the arch vertical leg over the  $\frac{5}{8}$ " rebar on both sides of the street.

6. Use the 16 gauge wire (qty 4, 10ft long) to support the arch on each side of the street. Attach to the arch upright at the holes above the black tape, 6ft from the ground. Wrap around the  $\frac{3}{8}$ " rebar stakes.

7. Place tennis balls over the ends of the stakes

